


Mainboard D2778 ATX Extended Lifecycle Series

Issue March 2008

Pages 2

Intel® X58 Express Chipset for DDR3 - 1333 SDRAM Memory (ECC Support)
and Intel® Xeon® ("Nehalem") and Core™ i7 Processors

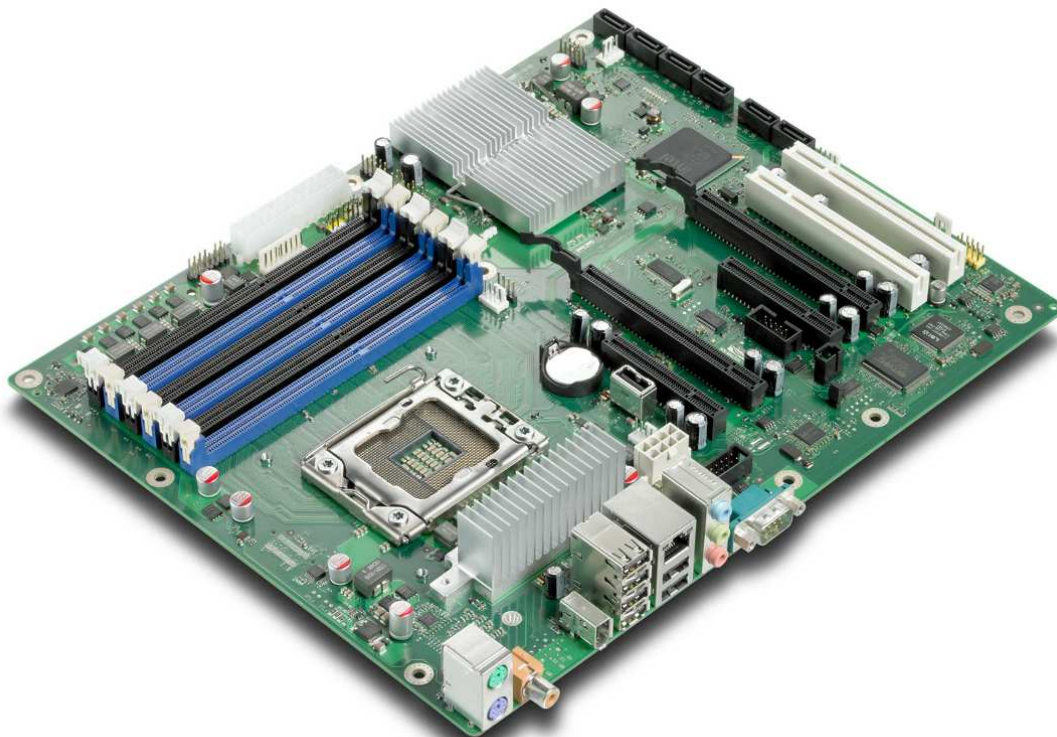

Chipset:

Intel® X58 Express Chipset
(Tylersburg-36S / ICH10-R)

Memory:


DDR3 800 SDRAM
DDR3 1066 SDRAM
DDR3 1333 SDRAM
with ECC Support (depends on processor)

Processors:

Intel® Xeon® Processor 5500 series
Intel® Xeon® Processor 3500 series
Intel® Core™ i7 Processor series
Compatible with Intel® processors LGA1366 (up to 130W TDP) supporting Intel® QuickPath Interconnect

Product Features:

Dual PCIe x16 (Gen2) onboard
5.1 multichannel audio onboard
LSI FW322 FireWire™ onboard
USB 2.0 onboard
GbE LAN onboard supporting ASF 2.0
Serial ATA II RAID onboard
Trusted Platform Modul V1.2 onboard
Intel® QuickPath technology



Board Size	ATX: 12" x 9.6" (304.8 x 243.8 mm)
Chipset	Intel® "Tylersburg" X58 Express Chipset / ICH10-R

Memory
 6 DIMM Sockets DDR3, max. 24GB, Single / Dual / Triple Channel
 800/1066/1333MHz, single rank / dual rank unbuffered, ECC / non-ECC support (depends on processor)

Processors
 Intel® Xeon® Processor 5500 series (Nehalem-EP)
 Intel® Xeon® Processor 3500 series (Nehalem-WS)
 Intel® Core™ i7 Processor series
 Socket B (LGA1366), max. 130W TDP, integrated Memory Controller
 (For details on supported processors please refer to our website)

Power Specification
 24 Pin System Power Connector + 8 Pin Processor Power Connector required
 Support for Soft-Off Power Supplies
 5V and 3.3V Supply Voltage on PCI Slots (PCI Rev. 2.3)
 3.3V Auxiliary Supply Voltage on PCI Slots (Wake-Up Function)
 On board CPU Voltage Regulator, 5V / 2A Auxiliary Power required for USB Wake-Up from Save-to-RAM, Save-to-Disk

Power Supply Requirements

Source	Voltage	Voltage Tolerance (max)	Supply Current (typ.)
Main Power	+ 12 V _{CPU}	± 5 %	8 A
	+ 12 V _{System}	± 5 %	6.5A
	- 12 V	± 10 %	0.05 A
Supply	+ 5 V	± 5 %	6.5 A
	+ 3.3 V	± 5 %	4.5A
Aux. Power Supply	+ 5 V	+5%; -3%	2 A

Configuration: Processor 130W (75% load); 6 x 2GB RAM; 1 x nVidia Quadro FX5800; 4 x SATA HDD; 2 x DVD Drive; Processor Fan + 3 x System Fan


BIOS
 Phoenix Secure Core BIOS Version 6.00
 modified and adapted by Fujitsu Siemens Computers; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update via disk (stable user settings), Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCI Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3 (Save-to-RAM), ACPI S4 (Save-to-Disk), Wake on time from S5

Security Features
 Recovery BIOS, System and BIOS Password, Boot Sequence Control for each Boot Device, Serial Port Access Protection, Boot Sector Virus Warning, Write Protection for Flash BIOS, Trusted Platform Module (TPM) V1.2 (Infineon)

Special Features
 Silent Fan Independent temperature related processor and fan supervision and control
 System Guard View and adjust Silent Fan
 Silent Drives Noise reduction for optical and hard disk drives
 Recovery BIOS Restores a corrupted BIOS
 Desk Update Simple driver update with DU DVD
 Multi Boot Comfortable boot from any boot device
 HDD Password Access protection for disk drives
 24/7 Operation Mainboard is designed for continuous operation

External Connectors

Mouse	LAN
-------	-----

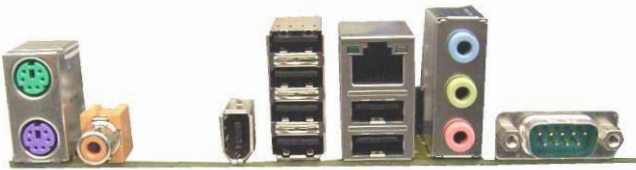

Keyb S/PDIF FireWire USB USB Audio COM1

Processor Heatsink D2778 is prepared for standard LGA1366 heatsinks with plastic push-pins.

Audio
 Realtek ALC663, 5.1 Multichannel, High Definition Audio

LAN
 Realtek 8111CP¹⁾ Ethernet Controller with 10/100/1000 MBit/s, ASF2.0, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display

Drives
 - 6 Serial ATA II 300 Interfaces (up to 3GBit/s, NCQ); RAID 0, 1, 10, 5

Version	D2778
Features	
Chipset	Intel X58 / ICH10R
Board Size	ATX
VGA	-
Stereo Audio / 5.1 Multichannel Audio	- / ✓
Buzzer / int. Speaker Support	- / ✓
LAN Gbit / 100 Mbit / 10 Mbit	✓ / ✓ / ✓
LAN ASF2.0 / DASH1.1 ¹⁾ / AoL / WoL / Boot / iAMT	✓ / - / - / ✓ / ✓ / ✓ / -
SATA / ATA / RAID / eSATA-support	✓ / - / ✓ / ✓ / ✓
FireWire™ / USB 2.0	✓ / ✓
FAN monitored PSU ²⁾ / CPU / AUX1 / AUX2 / AUX3	✓ / ✓ / ✓ / ✓ / ✓ / ✓
FAN controlled PSU ²⁾ / CPU / AUX1 / AUX2 / AUX3	✓ / ✓ / ✓ / ✓ / ✓ / ✓
TEMP monitored CPU / ONB1 / ONB2 / ONB3	✓ / ✓ / ✓ / ✓ / ✓

Special Features

Silent Fan / Silent Fan LT / System Guard / Silent Drives / 24-7 Operating Mode	✓ / - / ✓ / ✓ / ✓ / ✓
Recovery BIOS / Desk Update / Multi Boot	✓ / ✓ / ✓
HDD Password	✓
Logo Boot / Intel On Screen Branding	✓ / ✓

Internal Connectors

DIMM Sockets (DDR3 1333)	6
PCI Express x16 (Gen. 2)	2
PCI Express x8 Slot (4 Lanes, Gen.2)	1
PCI Express x8 Slot (4 Lanes, Gen.1)	1
PCI Slots (32Bit, 33 MHz, Rev. 2.3)	2
SATA (300) / ATA (100) / Floppy	6 / 0 / 0
S/PDIF (digital Audio) OUT / IN	1 / -
Audio Input	-
Frontpanel High Definition Audio (9-Pin)	1
FireWire™ (9-Pin, Intel standard header)	1
USB (2.0, ~480 MB/s, 2 channels per connector)	2
Specific socket for USB stick	1
Serial (FIFO, 16550 compatible)	1
FAN PSU ²⁾ / CPU / AUX1 / AUX2 / Aux3	1 / 1 / 1 / 1 / 1
SMBus (Case Temperature)	-
Intrusion (Case Open)	1
LCD Status Display Support	1
Parallel (EPP/ECP) Pin Connector ³⁾	1
Power 24 pin (BTX) / 8 pin (12V processor supply) ⁴⁾	1 / 1

External Connectors

VGA Sub D / DVI	- / -
Audio Mic. In / Line in / Line out (or driver configuration)	1 / 1 / 1
Audio Surround / RearSurround / CenterLFE	- / - / -
S/PDIF (digital Audio, cinch) OUT / IN	1 / -
S/PDIF (digital Audio, optical) OUT	-
LAN (RJ-45)	1
PS/2 Mouse / Keyboard	1 / 1
FireWire™ (6-Pin, IEEE 1394)	1
USB (2.0, ~480MB/s)	6
Serial (RS232, FIFO, 16550 compatible)	1
Parallel (EPP/ECP) ³⁾	-

- 1) Future version with LAN controller Realtek 8111DP instead of Realtek 8111CP (provides additional support for DASH1.1)
- 2) Not supported by standard Power Supplies
- 3) External parallel port possible via optional connector cable
- 4) Standard 4 pin connector can **NOT** be used!