


# ECR9102B 1U 19" Rackmount




## Features


- High-density 1U rackmount server chassis.
- Built-in powerful blower presents a remarkable in-housing thermal environment.
- Dual processors capability. Ultra flexible storage devices allocation.
- Unique tool-free maintenance design.
- Takes micro ATX, ATX motherboard (not extended ATX).
- Includes a 32Bit PCI Riser Card. Ask for other type of riser cards.
- Option: sliding rail kits available for installation in cabinet. Ref SLR3500
- Slide-in Mainboard plate for easy installation.
- Full set electro-plate anti-rust processing.
- Meets CE, FCC requirements.
- Available in beige ECR9102 or black ECR9102B.
- Option: Bracket for slim CD-ROM+FDD (Placed in the front 5.25" bay). (ECR9102B.001 Version).  
Supplied with an "SCR-242 to 40Pin IDE adaptor" to convert the Slim CD-ROM connector to a standard 40pin IDE connector.
- Does not take standard I/O shield. Please see below the only types of back windows available.

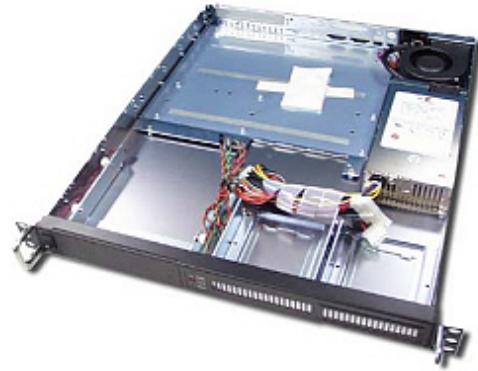

Bracket for Slim CD-ROM+FDD. (ECR9102B.001 version)



32Bit PCI riser card

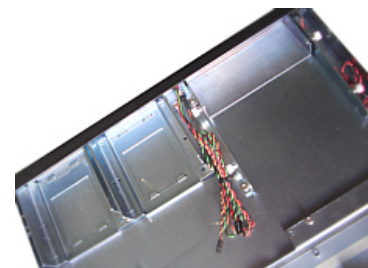

Dive space

## Specifications

Model number	ECR9102B.000	ECR9102B.001
5.25" Exp / Hidd	1 Standard	1 Slim
3.5" Exp / Hidd	1 / 1	2 / 1
Mainboard	Micro ATX, ATX	
Power Supply	250W 20pin, 4Molex, 2Floppy connectors Ask for additional connectors.	
Ventilation	1 x High speed ball bearing blower	
Dim: HxWxD	44x425x510mm (545 with handles)	
Weight: NW/GW	8 kg / 10 kg	
Packing	UK pallet: 30 pcs	



Optional rails for installation in cabinet.




Ever Case Technology (UK) Ltd.

Tel: 01592 655 111, Fax: 01592 655 666

E-mail: sales@evercase.co.uk Web: www.evercase.co.uk



Back Windows available for the ECR9102 19" Rackmount

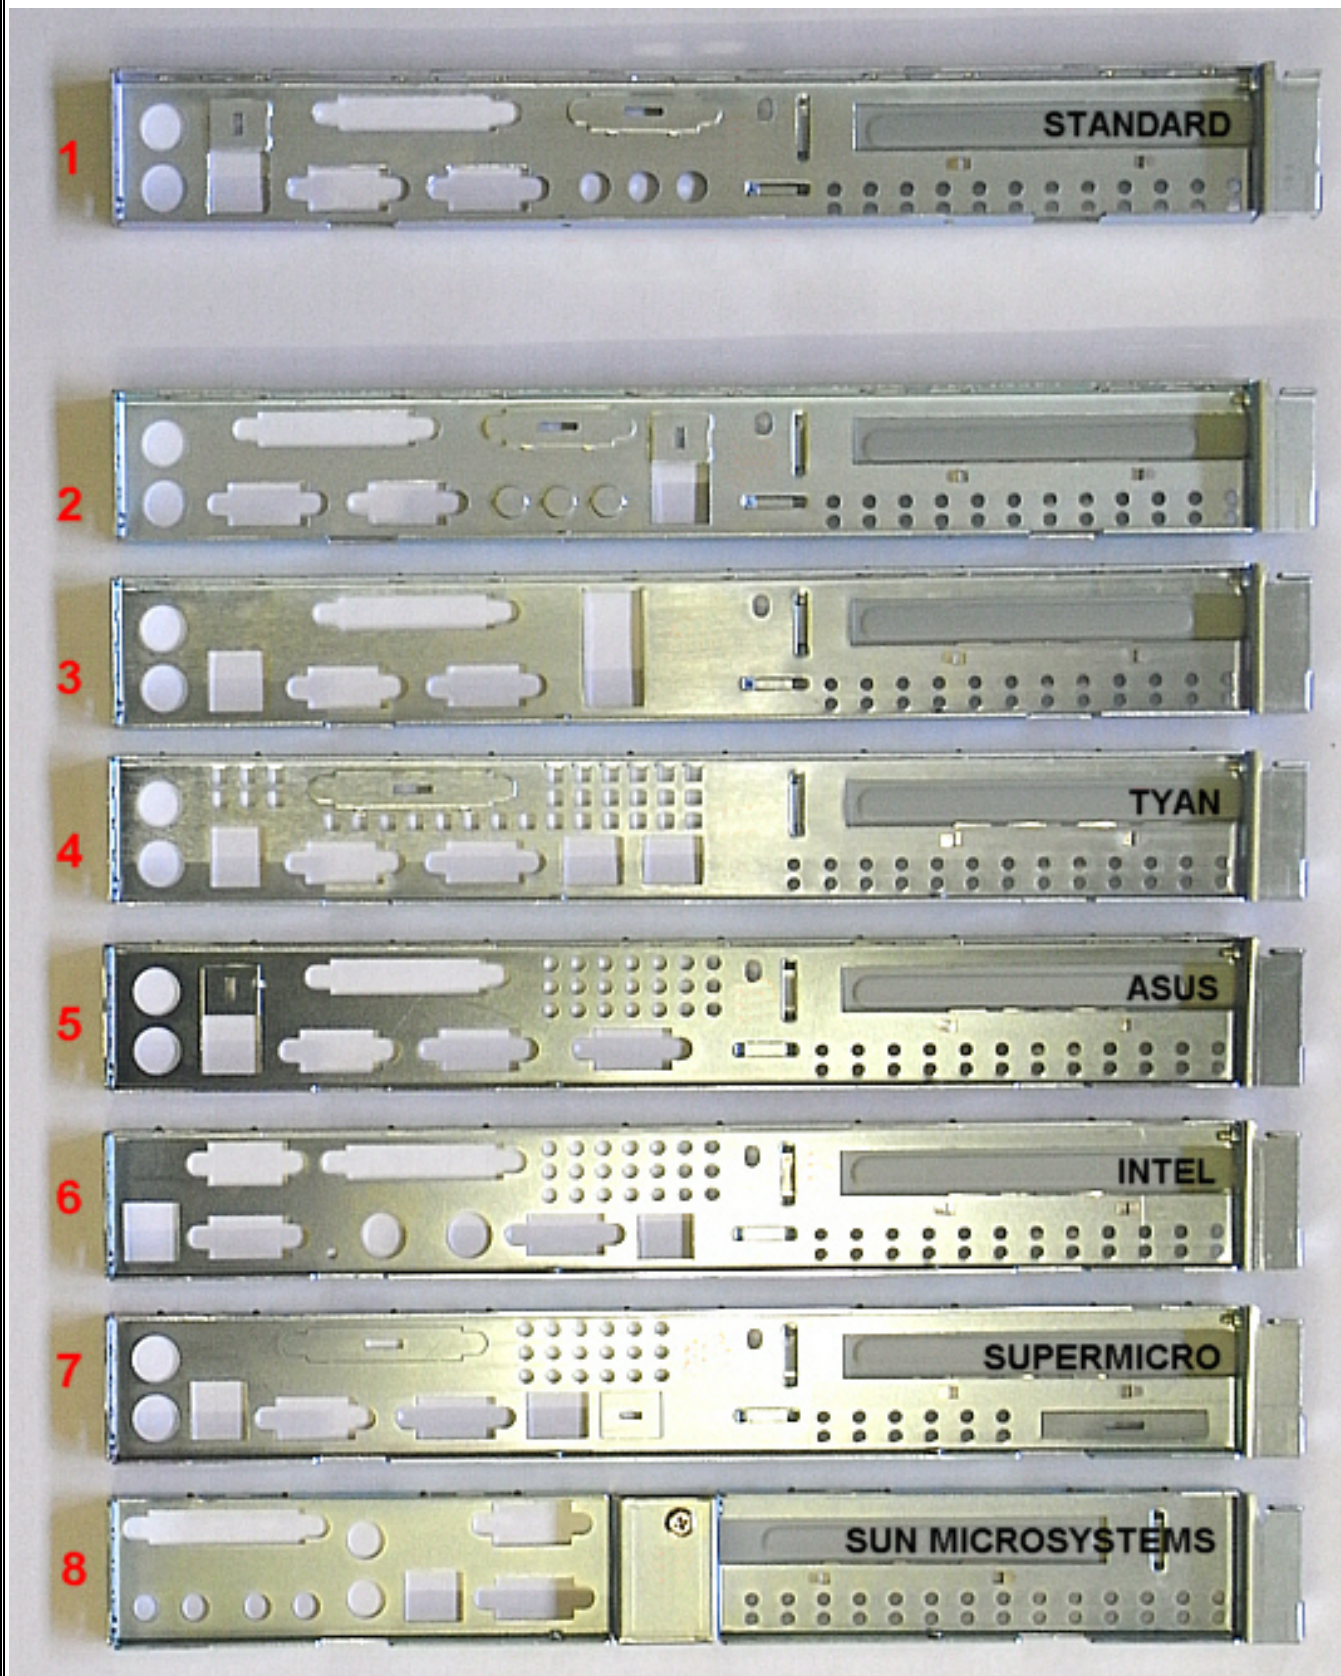

Should none of the back windows above be suitable, the rack could be used with no back window and no PCI card at all, leaving an open gap at the rear.