EVER CASE TECHNOLOGY (UK) LTD.
Unit 4, Randolph Court, Randolph Industrial Estate
Kirkcaldy, Fife KY1 2YY, UK
Tel: +44 (0) 1592 655 111 Fax: +44 (0) 1592 655 666
Web: www.evercase.co.uk E-mail: sales@evercase.co.uk

Model Number	**HP2-6460P**
Picture	
Label	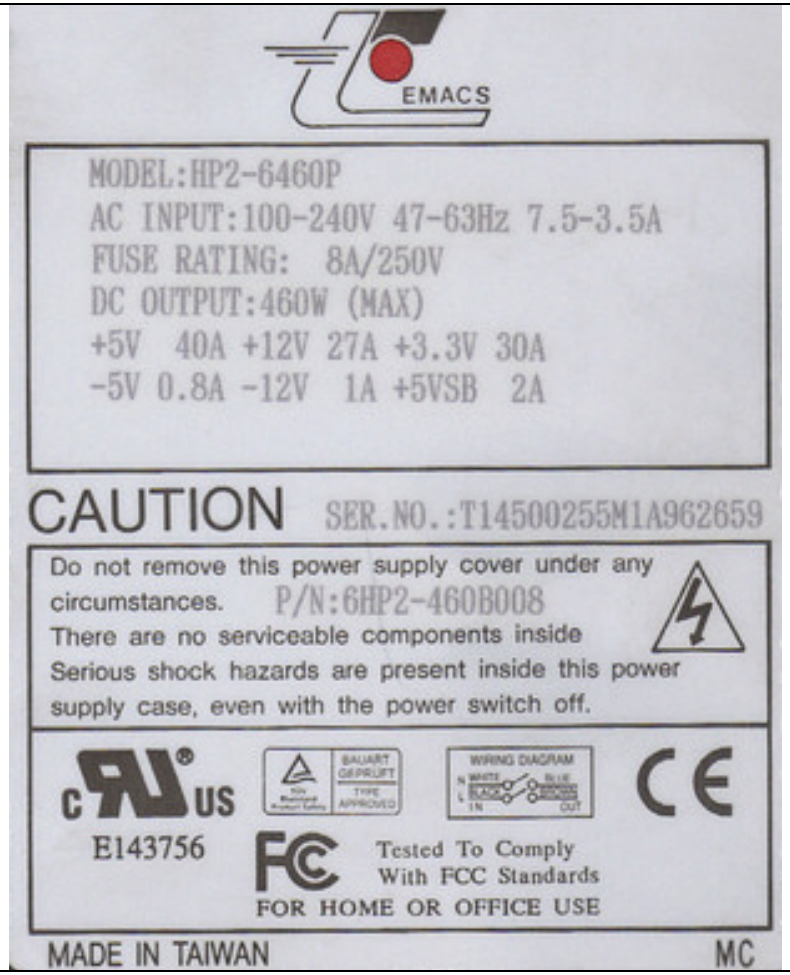

Brand	Zippy Emacs made in Taiwan	
Size	Standard PS2: 150x140x85mm	
Ventilation	1 x 80mm Fan	
Certifications	CE, FCC, TUV, RU	
Weight	2.5Kg	
Voltage	115 / 230Volt. Autorange, Can be used worldwide.	
Power Output	460Watt	
Form Factor (2 versions)	**WTX** (Workstation Technology Extended)	**EPS** (Entry-Level Power supply) **ATX** (Advanced Technology eXtended)
Connectors	24pin WTX(with 22wires) (62Cm Long), 8Pin (6wires) WTX, 8x Molex, 2x Floppy. Optional SATA adaptors	24pin EPS / ATX(62Cm Long), 8Pin (8wires) EPS, 7x Molex, 2x Floppy, 4pin P4, Optional SATA adaptors
Suitable motherboards	Tyan S2608 (Thunder i860) Tyan S2603 Iwill DP400 MSI MS-6508	Standard EPS / ATX
Replaces these PSU	GM430WTXW01SSV NMB IT002A430WSW PS430NMB	Standard EPS / ATX
Remark	WTX pinout used primarily by motherboards based on the Intel 860 chipset and the first-generation Xeon processor based on the Pentium 4. These motherboards also use an 8pin (with 6wires) connector for the CPU. This PSU is only suitable for the specific motherboards mentioned above. Please double check your motherboard manual for Main connector Pinout suitability before causing any damage as there are other types of WTX Pinout available on the market.	This PSU comes with a specific WTX type of connector but can be used for standard EPS / ATX with those 3 free adaptors: -24pin WTX to EPS / ATX adaptor. -8pin WTX to EPS adaptor -4pin 12Volt Pentium 4 adaptor. Please make sure you use those 3 adaptors if your board is a standard EPS / ATX board to avoid causing any damage.
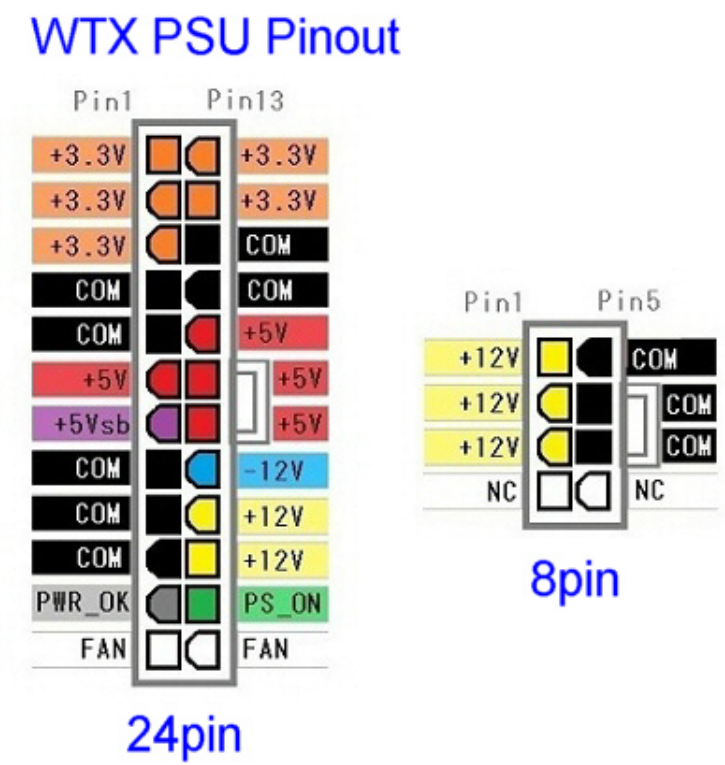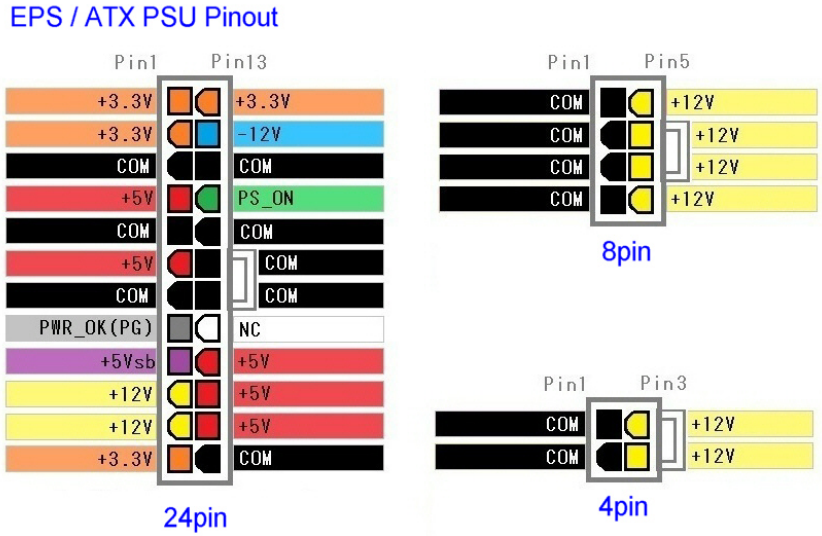
Connectors pinout